

ANTENNA SUPPORT

P/N: 1763

The Antenna Support is designed for installation of any kind of panel antennas, radio links up to Ø1,2 meters with strut support or other common telecom equipment. It can be installed on masts as well as conical towers.



FLEXIBILITY


The Antenna support can handle a wide range of all common frame leg designs, round, square, angular etc. When the included extensions on the upper support are used it will compensate for the inclination of towers.

QUALITY

All components are made of anodized aluminium and stainless steel which gives the support excellent corrosion resistance.

EASY ASSEMBLY

The choice of materials makes the product very light which makes the handling and installation very easy.

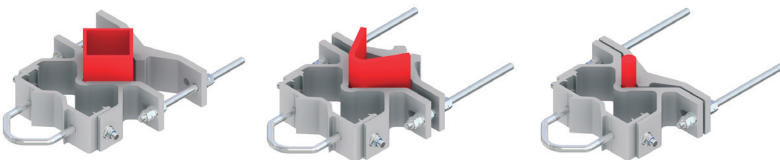

FUNCTION DESCRIPTION

Universal clamp kit in 2 levels with space for 1 mounting tube. Typical for installation of panel antennas, radio links or other common telecom equipment. When using a 1 meter mounting tube the antenna support can compensate for a 13° inclination of the frame member.

MECHANICAL DATA

Clamp profiles: Aluminum, Nature anodized 20µm
Extensions: Aluminum, Nature anodized 20µm
U-bolt: Acid proof stainless steel
Fasteners: Acid proof stainless steel

CLAMP MOUNTING RANGE

Frame	Min (in)	Max (in)
Tubes	Ø25 mm (Ø1,0 in)	Ø210 mm (Ø8,3 in)
Square profiles	25 x 25 mm (1,0 x 1,0 in)	150 x 150 mm (5,9 x 5,9 in)
90° Angle	35 x 35 mm (1,4 x 1,4 in)	150 x 150 mm (5,9 x 5,9 in)
60° Angle	95 mm opening (3,7 in opening)	210 mm opening (8,3 in opening)

PACKAGE DIMENSIONS

Length	Width	Height	Weight
285 mm	190 mm	150 mm	8,0 kg

ACCESSORIES

Identification	Ø mm (in)	t mm (in)	Typical Application
1217	75 (3,0)	3,5 (0,14)	Panel antenna max 2,6 m or Radio link max Ø0,6 m
1243	75 (3,0)	5 (0,20)	Panel antenna max 2,6 m or Radio link max Ø1,2 m
1242	90 (3,0)	5 (0,20)	Panel antenna max 2,6 m or Radio link max Ø1,2 m