


Product sheet • 1849 Rev.B Stand-Off Wall Support/120

# STAND-OFF WALL SUPPORT/120

P/N: 1849

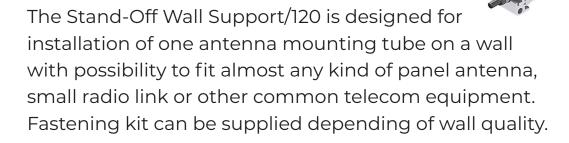

## **FLEXIBILITY**

The support is suitable for a tube range from Ø 75-120mm with a distance from wall to tube of 300 mm.

# **QUALITY**

All components are made of anodized aluminium and stainless steel which gives the support excellent corrosion resistance.

### **EASY ASSEMBLY**

The choice of materials makes the product very light which makes the handling and installation very easy.



#### **FUNCTION DESCRIPTION**

Stand-off wall support kit in two levels with space for one mounting tube. Typical for installation of panel antennas, radio links or other common telecom equipment. (Mounting tube not included)

#### **MECHANICAL DATA**

Mounting tube (not included): Ø75-120 mm (Ø1,0-4,7 in), see accessories

Distance between supports: Minimum 1000 mm (40 in). Distance from wall to tube: 300 mm (12 in). Support profiles: Aluminium, nature anodized 20 $\mu$ m. Fasteners: Acid proof stainless steel.

Wall installation (not included): Threaded M12 rods or expander bolts.

#### **PACKAGE DIMENSIONS**

Length	Width	Height	Weight
460 mm	150 mm	180 mm	12,0 kg
(18,1 in)	(5,9 in)	(7,1 in)	(26lb)

#### **ACCESSORIES**

Identification	Ø mm (in)	t mm (in)	Typical Application
1217	75 (3,0)	3,5 (0,14)	Panel antenna ≤0,8 m (≤32 in) or radio link ≤Ø0,3 m (≤Ø12 in)
1243	75 (3,0)	5 (0,20)	Panel antenna ≤2,3 m (≤90 in) or radio link ≤Ø0,6 m (≤Ø24 in)
1242	90 (3,0)	5 (0,20)	Panel antenna ≤2,6 m (≤102 in) or radio link ≤Ø0,8 m (≤Ø32 in)
1241	114 (4,5)	5 (0,20)	Panel antenna ≤2,6 m (≤102 in) or radio link ≤Ø1,2 m (≤Ø47 in)